

A


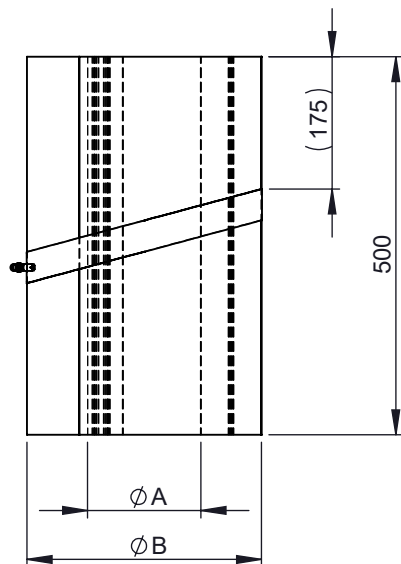
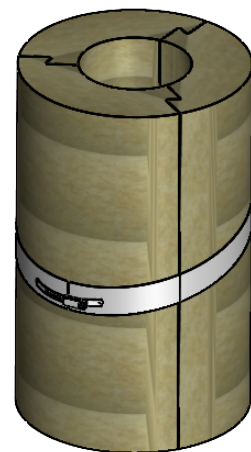
B

C

D

E

F

1 : 10 (ϕ 150)

ϕ	130	145	150	165	180	195	200	215	230	245	250	265	280	295	300	315	350
A	130	145	150	165	180	195	200	215	230	245	250	265	280	295	300	315	350
B	290	305	310	325	340	355	360	375	390	405	410	425	440	455	460	475	510
n	3					4											
kg	3,35	3,58	3,66	3,90	4,13	4,37	4,45	4,68	4,92	5,15	5,23	5,47	5,70	5,94	6,02	6,25	6,80

notes:

DIN ISO 13920 Tolerances B

revisions-no.

	date	name
drawn by	16.08.22	MBA
checked by	16.08.22	SWA
approved by	16.08.22	JWY
modified by		

Jeremias
CHIMNEY SYSTEMS

description Insulated transition, roof angle 5-22°

code ZUAC1736 ϕ

drawing-no. 07-04-5343-000

scale

1:10

format

A4

sheet

1 of 1

